



PRODUCT
GUIDE



CONTAINERISED LAUNCH SYSTEM



The Containerised Launch System (CLS) is the ideal solution for rapid mobilisation. It provides a complete launch system and control cabin in a single compact container, saving deck space, shipping and purchasing costs. The container is divided into two areas: 1) Control Cabin and 2) Launch Gantry / Winch.

The Control Cabin is designed to provide facilities for personnel to operate Remotely Operated Vehicles (ROVs) in a safe comfortable environment. The Launch Gantry enables the launch and recovery of the ROV without any manual handling.

Fitted with an Mk8 Electric Tether Winch (as standard), it's able to deploy up to 1,100m of 14mm diameter cable.



Tech Safe Systems Ltd, design and manufacture Cabins & Containers to satisfy a variety of purposes e.g. laboratories, control cabins, offices, workshops, etc. Our designs have been developed to meet the demands of regulatory standards worldwide for both Safe Area and ATEX hazardous environments.




For more information, contact TSS on: +44 (0)1493 444454 or email: info@techsafe.co.uk

CABINS & CONTAINERS

CONTAINERISED LAUNCH SYSTEM

SPECIFICATIONS (standard sizes: 12 / 16 / 20ft)

Outside Dimensions (mm):	4,876 (L) x 2,438 (W) x 2,743 (H)
Outside Dimensions (ft):	16 (L) 8 (W) x 9 (H)
Max. Gross Weight (kgs):	10,000
Launch SWL (kgs):	270
Outreach (m):	2.3
Operating Conditions:	Lloyds Sea State 6, 3.9m Significant Wave Height
Power Requirements:	380-460V AC 3Ph 50/60Hz
Rating Options:	Safe Area or Zone 2 ATEX
Design Temperature:	-20°C to +50°C
Certification:	SOLAS A60 compliant, DNV 2.7-1, BS EN 12079, Lloyd's Code for Lifting Appliances in a Marine Environment

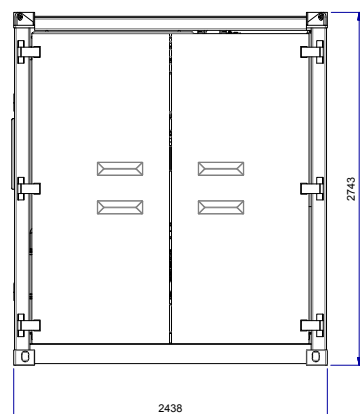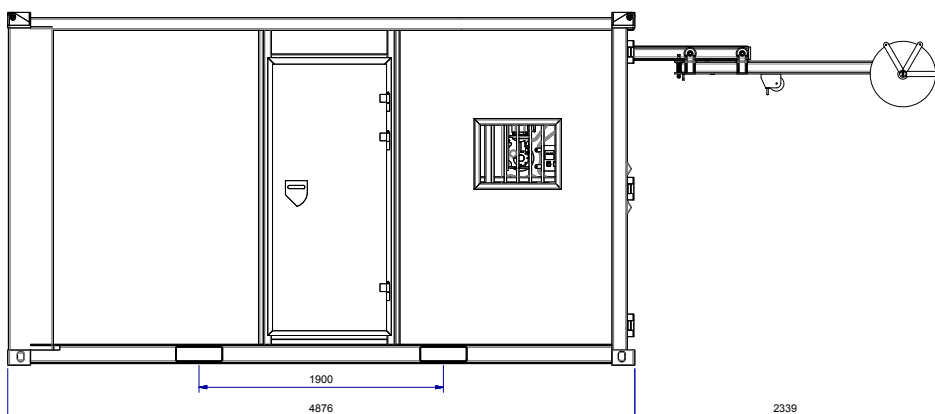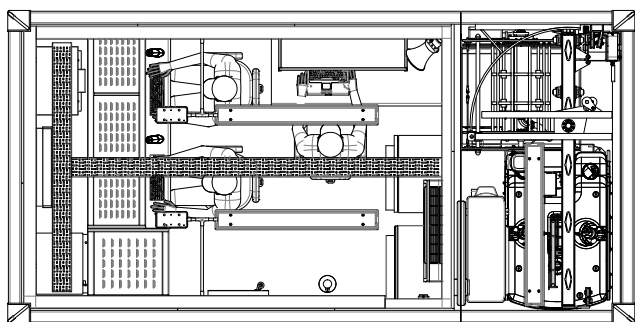

Dimensions shown in this leaflet do not always correspond to the standard specifications. Design and specifications are subject to change without prior notice. Dimensions may vary, subject to technical changes.